
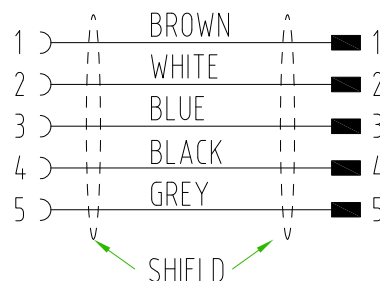
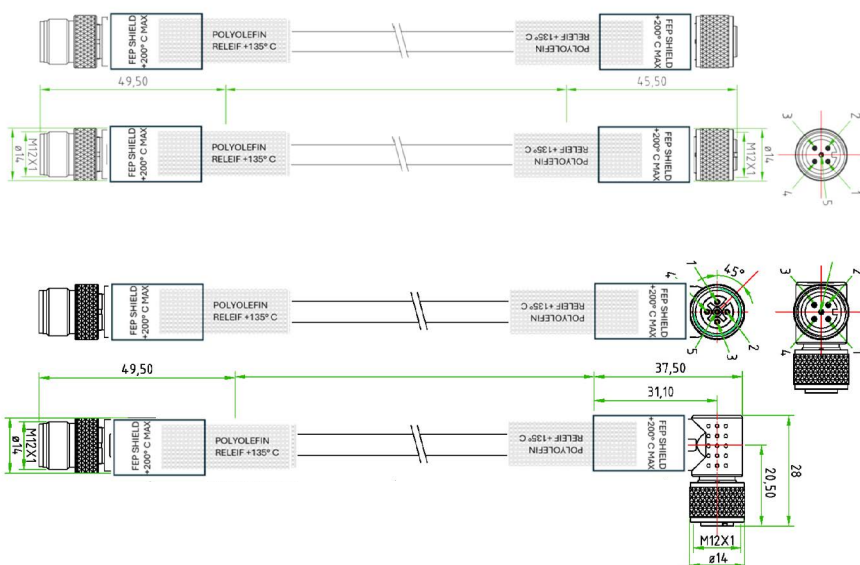


- ✓ FPE cable, suitable for welding environment
- ✓ Size S12 (M12 x 1 thread)
- ✓ 5 poles
- ✓ IP 69K



TECHNICAL DATA

Jacket material	FPE	Enclosure rating	IP69K (inserted and tightened)
Connector body material	Polypropylene - Black	Ambient temperature range	-70°C...+200°C
Coupling nuts material	Brass+nickel plated+ActivStone coating	Cable color	Black
Rated voltage	max. 60V AC/DC	Shielded	Alum foil and copper braid
Rated current per contact	max. 4 A	Flexion	> 1 million flex cycles@20XOD
Wire structure	5 x 0.34 mm²	Cable diameter	ø4 mm ±0.2

AVAILABLE TYPE

Part number	Part reference	Length	Type	Weight
605-002-490	S12-5FFG-006-NBWN-12MG	0.6 m	Straight-Straight	70 g
605-002-491	S12-5FFG-010-NBWN-12MG	1 m	Straight-Straight	80.5 g
605-002-492	S12-5FFG-020-NBWN-12MG	2 m	Straight-Straight	114 g
605-002-493	S12-5FFG-050-NBWN-12MG	5 m	Straight-Straight	224 g
605-002-494	S12-5FFG-100-NBWN-12MG	10 m	Straight-Straight	413 g
605-002-495	S12-5FFW-006-NBWN-12MG	0.6 m	Right Angle - Straight	70 g
605-002-496	S12-5FFW-010-NBWN-12MG	1 m	Right Angle - Straight	82 g
605-002-497	S12-5FFW-020-NBWN-12MG	2 m	Right Angle - Straight	117 g
605-002-498	S12-5FFW-050-NBWN-12MG	5 m	Right Angle - Straight	227 g
605-002-499	S12-5FFW-100-NBWN-12MG	10 m	Right Angle - Straight	415 g

Note: additional suffix can appear to indicate a revision version or a special version.

Die Einhaltung der Personenschutzmaßnahmen obliegt dem Betreiber, der von uns gelieferten Produkte. Der Einsatz unserer Geräte in Anwendungen, bei welchen die Sicherheit von Personen gefährdet sein könnte, ist nur dann zulässig, wenn der Betreiber gesonderte geeignete und notwendige Maßnahmen für die Personen- und Maschinensicherheit einhält und vornimmt. Änderungen und Liefermöglichkeiten vorbehalten. Für aktualisierte Version besuchen Sie regelmässig unsere Homepage.