
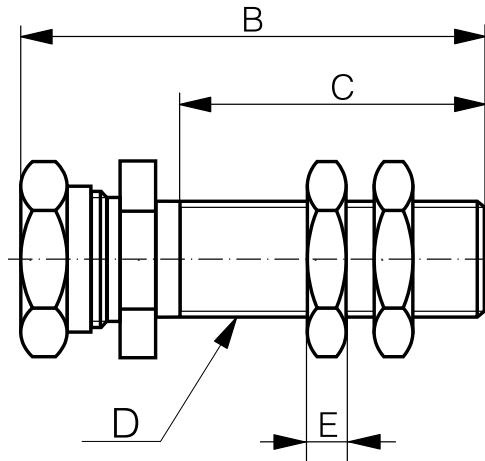
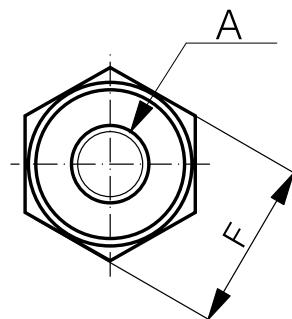


- ✓ For cylindrical sensors Ø 8 mm/M8, Ø 12 mm/M12, Ø 18 mm/M18
- ✓ Simple installation, reduced labor, reduced downtimes
- ✓ Equipped with limit stop, which allows sensors to be exchanged without the need for readjustment



MECHANICAL DATA

Material

Stainless steel V2A + ActivStone coating

AVAILABLE TYPES

Part number	Part reference	Sensor diameter A	Total length B	Threading length C	Threading D	E	F
606-000-029	ASU-3052-080	8 mm / M8	32,4 mm	17,5 mm	M12 × 1	3,9 mm	17 mm
606-000-030	ASU-3052-120	12 mm / M12	33,7 mm	19,5 mm	M16 × 1	4 mm	22 mm
606-000-031	ASU-3052-180	18 mm / M18	38,5 mm	20,0 mm	M24 × 1,5	5 mm	30 mm

Note: additional suffix can appear to indicate a revision version or a special version.

Operators of the products we supply are responsible for compliance with measures for the protection of persons. The use of our equipment in applications where the safety of persons might be at risk is only authorized if the operator observes and implements separate, appropriate and necessary measures for the protection of persons and machines. Terms of delivery and rights to change design reserved.